

I、 Introduction

1. High luminous efficiency
2. Solving the over-heat problem
3. High lumen maintenance
4. Convenient to install
6. Long life time & more stable




II、 Parameter

1. LED Emitting Color: Pure White
2. Size: Diameter=595mm, High=595mm
3. Housing: Aluminum

III、 Electro - Optical

Parameter	Symbol	Min		Max	Unit
Brightness	Flux	2300		2800	lm
Color Temperature	CCT	2700	4000	6000	K
Voltage	V / AC	100		240	V
Operation Temperature	To	-25	30	50	°C
Total Power	P		32		W
View Angle	2θ1/2		120		Deg.


IV、 Size

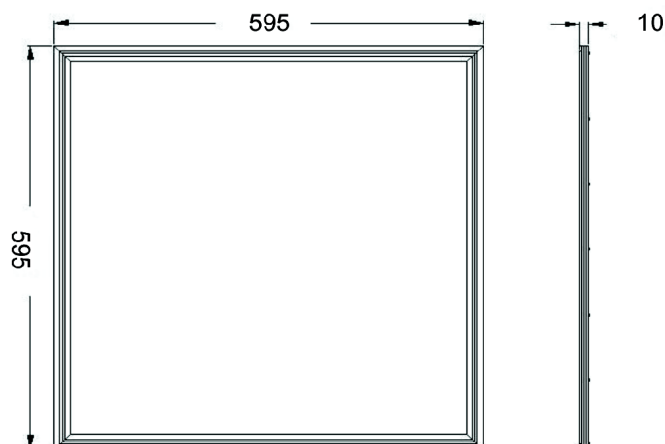

V、Product Details



Seamless installed into plaster ceiling

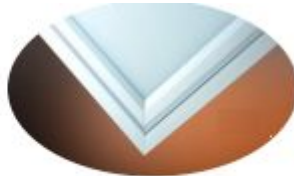

9mm thickness




Available frame colour
-Aluminum / silver colour



DC connector

VI、Light Distribution Curve and Average E(Lx) Figure

32w

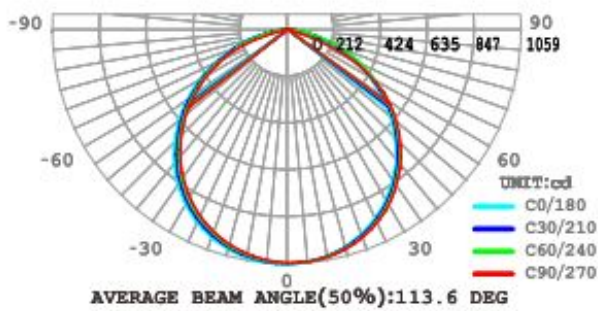

Height	CENTER E	AVR E	Diameter
1.00m	1059.27 lx	303.53lx	297.56 cm
1.50m	470.87 lx	143.35lx	446.84 cm
2.00m	264.83 lx	80.13 lx	595.13 cm
2.50m	169.56lx	51.72 lx	744.35 cm
3.00m	117.72 lx	35.84lx	893.39 cm

Angle:113.6 deg

VII、System Connection Diagram

