

PL-IL-XX-9*1W-4EM



I、 Introduction

1. No UV, IR or other deleterious radiation
2. Vivid emitting color
3. Can be replaced with tradition
4. Energy saving and safety

II、 Parameter


- 1.Total Power: 9W
2. LED Emitting Color: Warm White/ Pure White / Cool W
3. Voltage: AC220V
4. IP Grade : IP65
5. Lifetime: >40, 000 hours



III、 Electro - Optical

| Para-Meter | Note | Test condition | | | | Unit |
|-----------------------|---------------------|---|------|------|------|-----------|
| | | | Min. | Typ. | Max. | |
| Flux | Luminous Flux | Yuanfang PMS-50 system 0.5m integral sphere, each I _f =12.5mA | 700 | 800 | 900 | lm |
| CCT | Color Temperature | Yuanfang PMS-50 system 0.5m integral sphere | 2700 | 4000 | 7000 | K |
| V_{in} | Voltage input | Philips high frequency electronic transformer. 12V.Taiwan HIOKI 3332 POWER HITESTER | 85 | | 265 | V |
| T_{sd} | Surface Temperature | Ambient temperature 20°C. After 1 hour of continuous work | -20 | | 55 | °C |
| P_{in} | Total Power | Taiwan HIOKI 3332 POWER HITESTER | | 9 | | W |

IV、 Size (Unit : mm) H150*300MM

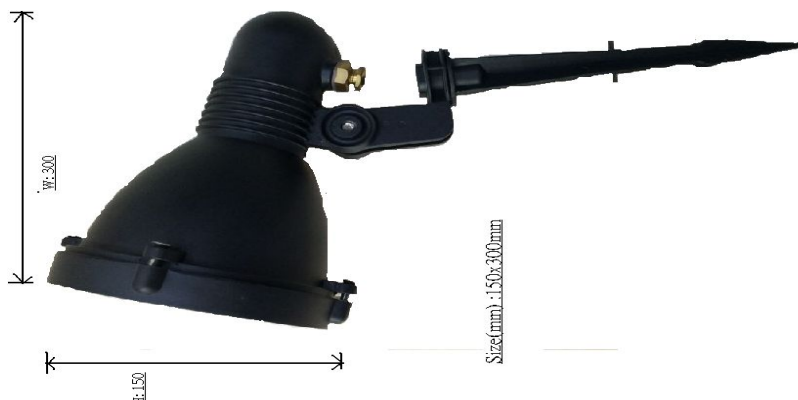

<http://www.powerled.com.hk>
E-mail:sales@powerled.com.hk