

PL-HP/JDR/E27-WW/3*1W-5A



I、 Introduction

1. No UV, IR or other deleterious radiation
2. Vivid emitting color
3. Can be replaced JDR with tradition
4. Energy saving and safety




II、 Parameter

1. LED quantity: 3pcs
2. LED Emitting Color: Warmwhite
3. Voltage: AC200-240V
4. Lifetime: >50, 000 hours

III、 Electro - Optical

Para-Meter	Note	Test condition				Unit
			Min.	Typ.	Max.	
Flux	Luminous Flux	Yuanfang PMS-50 system 0.5m integral sphere, each $I_f=12.5mA$		210		lm
2 θ 1/2	Viewing Angle			30		Deg.
CCT	Color Temperature	Yuanfang PMS-50 system 0.5m integral sphere		3000		K
E	Luminosity	Distance: 2 feet	/	/	/	lm/m²
I_{in}	Current input	Philips high frequency electronic transformer. 12V.Taiwan HIOKI 3332 POWER HITESTER				mA
V_{in}	Voltage input		200		240	V
T_{sd}	Surface Temperature	Ambient temperature 20°C. After 1 hour of continuous work	25	30	35	°C
P_{in}	Total Power	Taiwan HIOKI 3332 POWER HITESTER		3.5		W
η	Energy conversion efficiency	$\eta = P_{out} / P_{in}$		63		%

VI、 Size (mm)

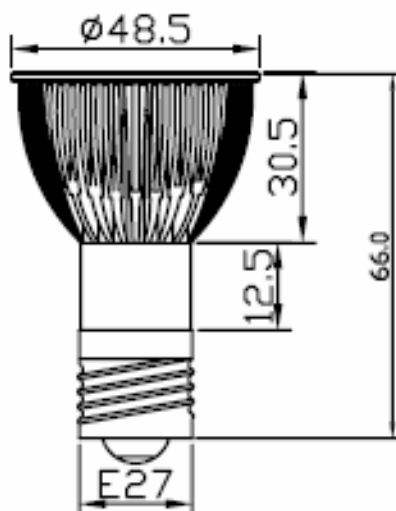

<http://www.powerled.com.hk>
E-mail:sales@powerled.com.hk