

I、 Introduction

1. Infrared Sensor LED tube light.
2. Start-up in a second, No flash, No UV.
3. Don't need to repair, its life time, is 10 times of traditional fluorescent tube.
4. It is used environmentally and saving energy, its consumption is same to 1/10 of traditional fluorescent tube.
5. soft light, vision of color is also good.




II、 Parameter

1. Lens: Diffused, Milky
2. Color: Pure White
3. Lifetime: >50000 Hours
4. Power consumption in dormant state:-3W- 0W (0%-100% can be set up in our factory)
5. Saving status: 10 -15 seconds
6. The induction distance: in 5-8 meters

Item	Symbol	Tested Parameter			Unit
		Min		Max	
Brightness 10W	Flux		950		lm
Brightness 0W	Flux		0		lm
Color Temperature	CCT		4000		K
Voltage AC	Vin	85		265	V
Temperature	Topr	-20		40	°C
Storage Temperature	Trms	-40		60	°C
Power 100%	PLED		10		W
Power 0%	PLED		0		W
View Angle	2θ1/2		120		Deg.

III、 Size (mm)

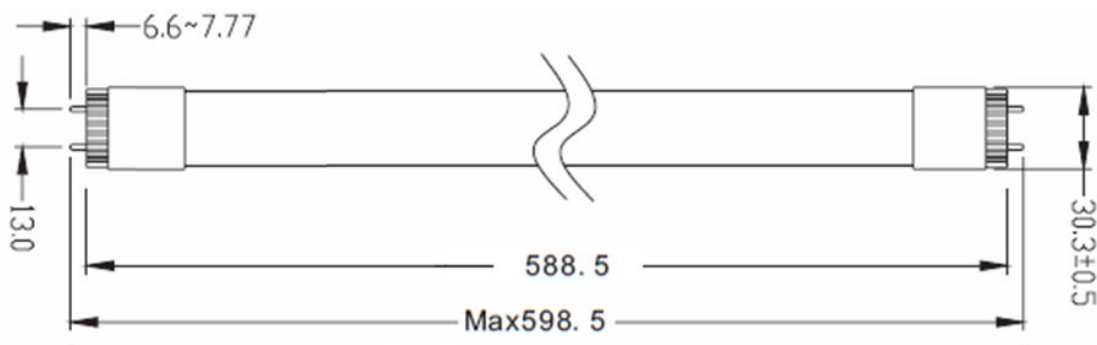

Installation method:

